

LMP 60


Pneumatic pressure test pump LMP 60 is a hand pump operated and designed to generate pressure range -950 mbar ... 60 bar. 0,1 mbar pressure resolution. Build-in filters to protect from dirt and moisture to reduce the need for maintenance. Two hand-tight quick connectors installed on the pump, allows easy connecting and disconnecting to the test pump without the need for PTFE tape or wrenches.

APPLICATIONS

Calibrations and verifications on-site
Range pressure generation -0,950 bar ... 60 bar
Suitable for all types of pressure equipment

HIGHLIGHTS

Easy of use
Compact, lightweight
High pressure thanks to a pressure wheel
High precision thanks to the fine adjustment valve
High resolution 0.1 mbar
Hand-tight quick connectors

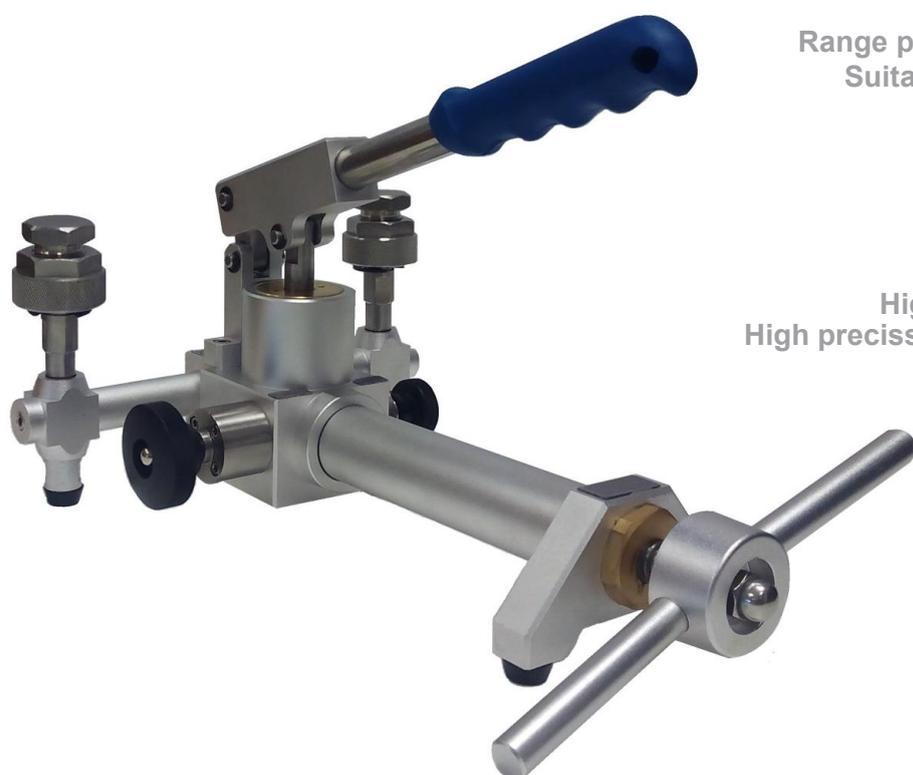

INCLUDES:

Output connection 2xM20x1.5 female
Pneumatic hand pump pressure generator
Pressure wheel
Fine adjustment valve
Relieve and reverse valves



Technical data

Pressure range	-0.95 ... 60 bar
Medium	Air
Process connection	2x M20 x 1.5 Female
Fine adjustment of pressure	Fine adjustment valve resolution 0,1 mbar
Overpressure connection	Ajustable via locknut
Material	Stainless steel, aluminum Seals: Buna-N
Dimensions	286L x 198W x 140H (mm)
Weight	2.7 kg

INCLUDED IN THE SUPPLY

Handpump LMP 60
Pneumatic handpump pressure generator
Reference manometer adapter NPT 1/4" (female)

OPTIONAL

Carrying case bomb test
Dimensions in mm (W/H/D) 395 x 295 x 106
Service kit for hand pump test LMP 60 with several O-rings and seals
Precision digital pressure gauge IKA 200 / IKA 300
Set of adapters 10 pcs.



info@leyro.net