

CITREX H5

Technical specification

analyser
the art of measuring

The ideal all-in-one testing device for biomedical engineers, independent service organisations, anaesthesia device and ventilator manufacturers.

CITREX H5 is the gas flow and pressure measurement instrument with the most advanced user interface. It's portable, accurate and enables users to individually configure their measuring screens.

The new CITREX H5 is designed to meet a wide variety of day-to-day applications. Its precise and highly reliable capabilities allow it to analyse the performance of different medical devices such as ventilators and anaesthesia machines or oxygen flow meters, pressure gauges and suction devices.

Features:

- Big 4.3" multi-touch display with 800 × 480 pixels
- Intuitive graphical user interface
- Extended profile capabilities
- Flow and pressure trigger settings
- Up to 17 gas standards and up to 26 respiratory parameters
- On-screen measurement, realtime parameter reading
- Statistics evaluations





« The ideal all-in-one mobile testing device for all ventilators. »

Technical specification CITREX H5

Flow and pressure measurements		
Flow	Flow	$\pm 300 \text{ sL/min}^{***}$ $\pm 1.9\% *$ or $\pm 0.1 \text{ L/min}^{**}$
Measuring direction bidirectional		Yes
Temperature compensated		Automatic
Pressure compensated		Automatic
Humidity compensated		Manually
Pressure		
High	P_{High}	$0..10 \text{ bar}$ $\pm 1\% *$ or $\pm 10 \text{ mbar}^{**}$
Differential	P_{Diff}	$\pm 200 \text{ mbar}$ $\pm 0.75\% *$ or $\pm 0.1 \text{ mbar}^{**}$
Flow channel	P_{Channel}	$-50..150 \text{ mbar}$ $\pm 0.75\% *$ or $\pm 0.1 \text{ mbar}^{**}$
Atmospheric pressure	P_{Atmo}	$500..1150 \text{ mbar}$
Units		
Flow		L/min, L/s, cfm, mL/min, mL/s
Pressure		bar, mbar, cmH ₂ O, Torr, inHg, hPa, kPa, mmHg, PSI
Other measurement		
Oxygen (pressure comp. $\leq 150 \text{ mbar}$)	O_2	$0..100\%$ $\pm 1\% O_2^{**}$
Gas temperature	Temp.	$0..50\text{ }^\circ\text{C}$ $\pm 1.75\% *$ or $\pm 0.5\text{ }^\circ\text{C}^{**}$
Gas types		Air, Air/O ₂ , O ₂ , N ₂ O, N ₂ O/O ₂ , CO ₂ , N ₂ , Heliox (21% O ₂)
Gas standards		ATP, ATPD, ATPS, AP21, STP, STPH, BTPS, BTPS-A, BTPD, BTPD-A, 0/1013, 20/981, 15/1013, 25/991, 20/1013, NTPD, NTPS
Ventilation parameter		
Breath rate	Rate	$1..1000 \text{ AZ/min}$ $\pm 1 \text{ AZ/min} *$ or $\pm 2.5\%^{**}$
Time	T_i, T_e	$0.05..60 \text{ s}$ $\pm 0.02 \text{ s}$
Ratio	I:E	$1:300..300:1$ $\pm 2.5\% *$
	T_i/T_{cyc}	$0..100\%$ $\pm 5\% *$
Volume	V	$\pm 2\% *$ or $\pm 0.20 \text{ mL} (>6 \text{ sL/min})^{**}$
Tidal Volume	V_{ti}, V_{te}	$\pm 10 \text{ L}$ $\pm 2\% *$ or $\pm 0.20 \text{ mL} (>6 \text{ sL/min})^{**}$
Minute volume	V_i, V_e	$0..300 \text{ sL/min}$ $\pm 2.5\% *$
Peak flow	$PF_{\text{Insp}}, PF_{\text{Exp}}$	$\pm 300 \text{ sL/min}$ $\pm 1.9\% *$ or $\pm 0.1 \text{ sL/min}^{**}$
Pressure	$P_{\text{Peak}}, P_{\text{Mean}}, P_{\text{EEP}}, P_{\text{Plateau}}, IPAP$	$0..150 \text{ mbar}$ $\pm 0.75\% *$ or $\pm 0.1 \text{ mbar}^{**}$
Compliance	C_{Stat}	$0..1000 \text{ mL/mbar}$ $\pm 3\% *$ or $\pm 1 \text{ mL/mbar}^{**}$
General information		
Realtime curves		Yes
Display		4.3" Multi-Touch (color)
Interface		RS-232, USB, Ethernet, CAN, Analog Out, TTL, WLAN
Data storage		Internal and Micro SD Memory Card
Power		100..240 VAC, 50..60 Hz
Dimension (w x d x h)		11.4 x 7 x 7.3 cm
Weight		0.52 kg
Battery		5 hours
Approvals		CE, CSA (Canada and USA)

The greater tolerance is valid: * Tolerance related to the measured value, ** Absolute tolerance,
 *** The unit sL/min is based on ambient conditions of 0 °C and 1013.25 mbar (DIN 1343).

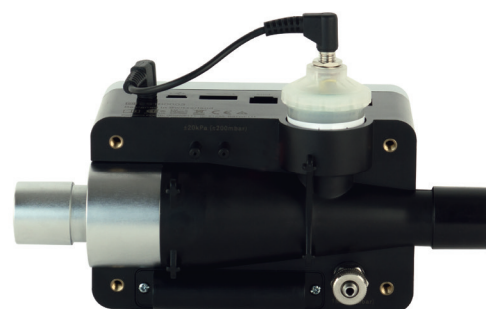

imtmedical

imtmedical ag . Gewerbestrasse 8 . 9470 Buchs . Switzerland
 T +41 81 750 66 99 . www.imtmedical.com



All ® and ™ labeled brands and products are property of the company imtmedical and cannot be used without written consent. Subject to changes without notice.