
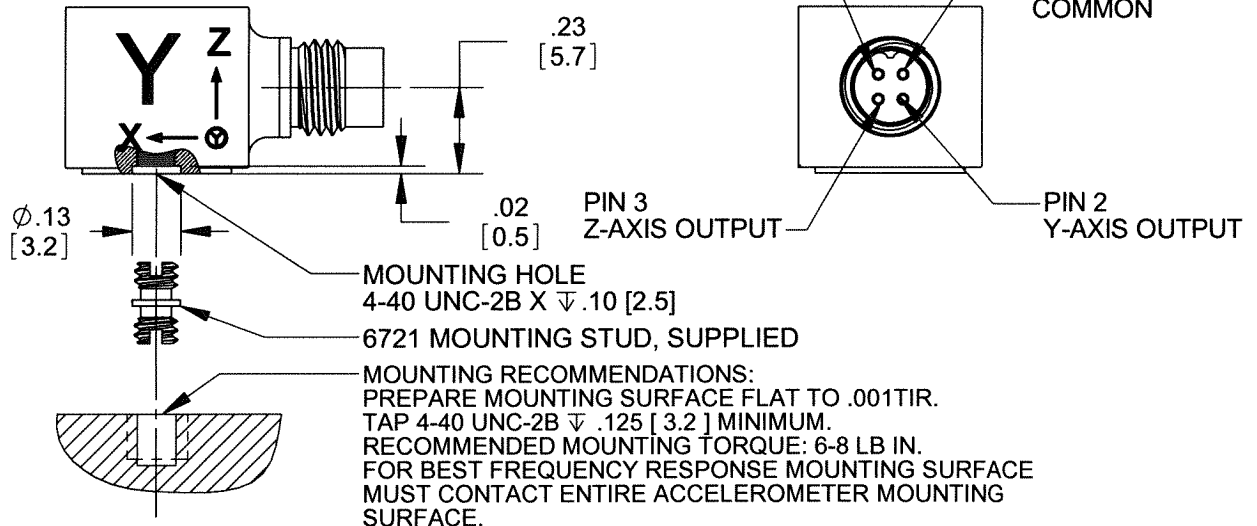
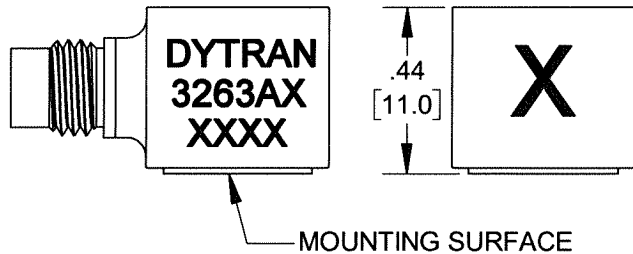


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

REVISIONS					
REV.	ECN	DESCRIPTION	BY/DATE	CHK	APPR
B	8131	ADDED: 3263A2 & A3, NOTE 3 IS: ...MAX WAS... NOMINAL	JS 12/14/11	DV	ANS
C	14892	INITIAL RELEASE OF 3263A14	KG 02/07/19	h	MH

MODEL	SENSITIVITY
3263A1	10 mV/g
3263A2	100 mV/g
3263A3	50 mV/g
3263A14	20 mV/g

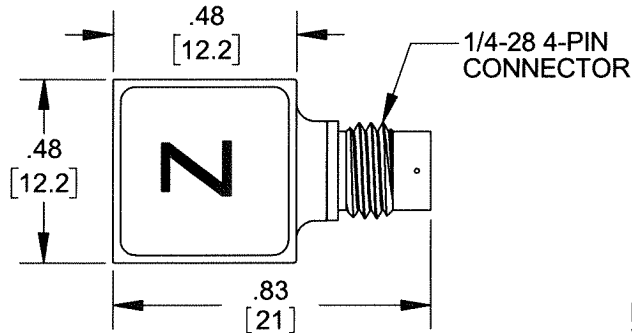

4. MATES WITH DYTRAN MODEL 6811AXX (XX = LENGTH IN FEET)
 3. WEIGHT: 5.6 GRAMS MAX
 2. ARROWS INDICATE ACCELERATION DIRECTION FOR POSITIVE OUTPUT.
 1. HOUSING MATERIAL: TITANIUM ALLOY
- NOTES: UNLESS OTHERWISE SPECIFIED.

MOUNTING RECOMMENDATIONS:
PREPARE MOUNTING SURFACE FLAT TO .001TIR.
TAP 4-40 UNC-2B ∇ .125 [3.2] MINIMUM.
RECOMMENDED MOUNTING TORQUE: 6-8 LB IN.
FOR BEST FREQUENCY RESPONSE MOUNTING SURFACE
MUST CONTACT ENTIRE ACCELEROMETER MOUNTING
SURFACE.

UNLESS OTHERWISE SPECIFIED: INTERPRET DIM & TOL PER ASME Y14.5M - 1994. REMOVE BURRS. COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA. CHAM EXT THDS 45° TO MINOR DIA. THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS. THDS PER MIL-S-7742. DIMENSIONS APPLY AFTER FINISHING. ALL MACHINED SURFACES. TOTAL RUNOUT WITHIN .005. BREAK SHARP EDGES .005 TO .010. MACHINED FILLET RADII .005 TO .015. WELDING SYMBOLS PER AWS A2.4. ABBREVIATIONS PER MIL-STD-12.	
USED ON	NEXT ASSY
APPLICATION	
THIRD ANGLE PROJECTION USA	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS TOLERANCES ARE:		
INCHES	METRIC	ANGLES
.XX ± .03	.X ± 0.8	± 1°
.XXX ± .010	.XX ± 0.25	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		


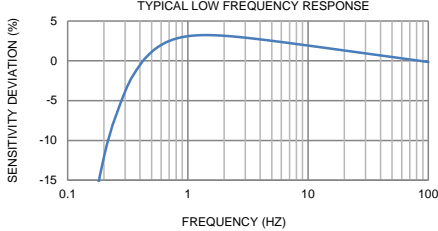
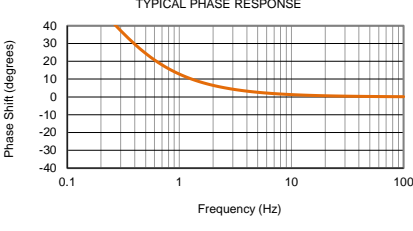
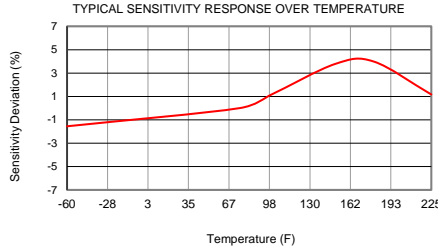
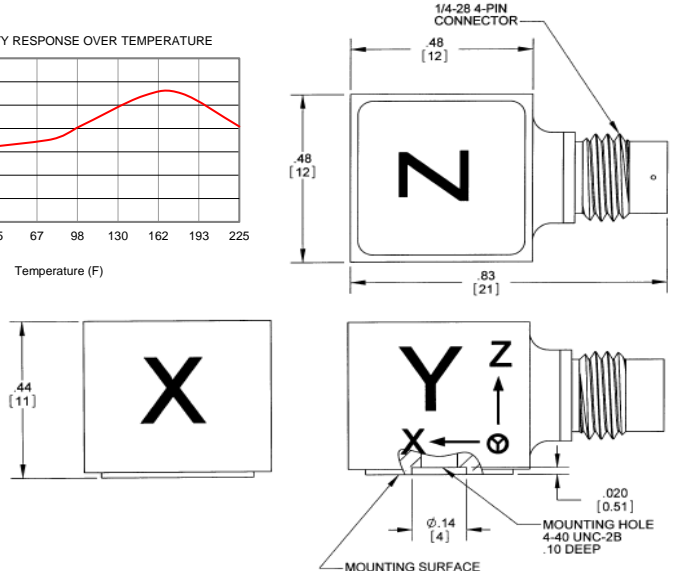
CONTRACT NO.




TITLE: **OUTLINE/INSTALLATION
DRAWING, MODEL 3263A
SERIES ACCELEROMETER**

APPROVALS	DATE
ORIG	RA
CHK	JS
APP	DV
APP	

SIZE	CAGE CODE	DWG. NO.	REV
A	2W033	127-3263A3	C
SCALE: NONE		SOLIDWORKS	SHEET 1 OF 1

MODEL NUMBER 3263A2		PERFORMANCE SPECIFICATION				DOC NO. PS3263A2																																																											
		TRIAxIAL ACCELEROMETER, IEPE				REV L, ECN 16994, 01/19/23																																																											
<div></div> <div>ACTUAL SIZE</div>		<div>• TRIAXIAL ACCELEROMETER</div> <div>• HIGH SENSITIVITY</div> <div>• MINIATURE SIZE</div>				<div>This family also includes:</div> <table><tr><th>Model</th><th>Sensitivity (mV/g)</th><th>Range (g pk)</th><th>Resolution (g RMS)</th><th>Oper. Temp(°F)</th><th>TC</th></tr><tr><td>3263A1</td><td>10</td><td>500</td><td>0.008</td><td>-60 to +250</td><td>1.0 to 2.0</td></tr><tr><td>3263A3</td><td>50</td><td>100</td><td>0.0016</td><td>-60 to +225</td><td>1.0 to 2.0</td></tr><tr><td>3263A14</td><td>20</td><td>250</td><td>0.004</td><td>-60 to +250</td><td>1.0 to 2.0</td></tr></table> <div>Please, refer to the performance specifications of the products in this family for detailed description.</div> <div>SUPPLIED ACCESSORIES</div> <div>a) Model 6721 mounted stud 4-40 to 4-40.</div> <div>Notes:</div> <div>[1] Connector mates with Dytran cable assembly Model 6811AXX (XX= length in feet)</div> <div>[2] Measured at 100 Hz, 1 grms per ISA RP 37.2.</div> <div>[3] Measured using zero-based best straight-line method, % of F.S. or any lesser range.</div> <div>[4] Do not apply power to this device without current limiting, 20 mA MAX.</div> <div>To do so will destroy the integral IC amplifier.</div> <div>[5] In the interest of constant product improvement, we reserve the right to change specifications without notice.</div>		Model	Sensitivity (mV/g)	Range (g pk)	Resolution (g RMS)	Oper. Temp(°F)	TC	3263A1	10	500	0.008	-60 to +250	1.0 to 2.0	3263A3	50	100	0.0016	-60 to +225	1.0 to 2.0	3263A14	20	250	0.004	-60 to +250	1.0 to 2.0																																		
Model	Sensitivity (mV/g)	Range (g pk)	Resolution (g RMS)	Oper. Temp(°F)	TC																																																												
3263A1	10	500	0.008	-60 to +250	1.0 to 2.0																																																												
3263A3	50	100	0.0016	-60 to +225	1.0 to 2.0																																																												
3263A14	20	250	0.004	-60 to +250	1.0 to 2.0																																																												
<div>PHYSICAL</div> <div>Weight, Max.</div> <div>Mounting, Integral Thread</div> <div>Connector [1]</div> <div>Material Body</div> <div>Sensing Element</div>		<table><tr><th colspan="2">ENGLISH</th><th colspan="2">SI</th></tr><tr><td>Type</td><td>4 PIN</td><td>4 PIN</td><td></td></tr><tr><td>Material</td><td>Titanium</td><td>Titanium</td><td></td></tr><tr><td>Material</td><td>Ceramic</td><td>Ceramic</td><td></td></tr><tr><td>Mode</td><td>Shear</td><td>Shear</td><td></td></tr></table>		ENGLISH		SI		Type	4 PIN	4 PIN		Material	Titanium	Titanium		Material	Ceramic	Ceramic		Mode	Shear	Shear		<table><tr><td>0.2</td><td>oz</td><td>5.6</td><td>grams</td></tr><tr><td>4-40 UNC-2B</td><td></td><td>4-40 UNC-2B</td><td></td></tr><tr><td>4 PIN</td><td></td><td>4 PIN</td><td></td></tr><tr><td>Titanium</td><td></td><td>Titanium</td><td></td></tr><tr><td>Ceramic</td><td></td><td>Ceramic</td><td></td></tr><tr><td>Shear</td><td></td><td>Shear</td><td></td></tr></table>		0.2	oz	5.6	grams	4-40 UNC-2B		4-40 UNC-2B		4 PIN		4 PIN		Titanium		Titanium		Ceramic		Ceramic		Shear		Shear																	
ENGLISH		SI																																																															
Type	4 PIN	4 PIN																																																															
Material	Titanium	Titanium																																																															
Material	Ceramic	Ceramic																																																															
Mode	Shear	Shear																																																															
0.2	oz	5.6	grams																																																														
4-40 UNC-2B		4-40 UNC-2B																																																															
4 PIN		4 PIN																																																															
Titanium		Titanium																																																															
Ceramic		Ceramic																																																															
Shear		Shear																																																															
<div>PERFORMANCE</div> <div>Sensitivity +/- 10% [2]</div> <div>Range F.S. For ± 5 Volts Output</div> <div>Frequency Response, ±5%</div> <div>Frequency Response, -10%/+15%</div> <div>Resonant Frequency</div> <div>Phase Response, ± 5°</div> <div>Linearity, Max [3]</div> <div>Transverse Sensitivity, Max.</div> <div>Equivalent Electrical Noise Floor</div> <div>Spectral Noise</div> <div>Strain Sensitivity @ 250µε</div>		<table><tr><td>100</td><td>mV/g</td><td>10.2</td><td>mV/ m/s²</td></tr><tr><td>± 50</td><td>g pk</td><td>± 490</td><td>m/s² pk</td></tr><tr><td>0.5 to 4,000</td><td>Hz</td><td>0.5 to 4,000</td><td>Hz</td></tr><tr><td>0.3 to 10000</td><td>Hz</td><td>0.3 to 10000</td><td>Hz</td></tr><tr><td>>40</td><td>kHz</td><td>>40</td><td>kHz</td></tr><tr><td>2 to 3000</td><td>Hz</td><td>2 to 3000</td><td>Hz</td></tr><tr><td>± 1%</td><td>%F.S</td><td>± 1%</td><td>%F.S</td></tr><tr><td>6%</td><td></td><td>6%</td><td></td></tr><tr><td>0.0008</td><td>g RMS</td><td>0.008</td><td>m/s² RMS</td></tr><tr><td>1Hz</td><td>µg RMS/√(Hz)</td><td>981</td><td>µm/s² RMS/√(Hz)</td></tr><tr><td>10Hz</td><td>µg RMS/√(Hz)</td><td>491</td><td>µm/s² RMS/√(Hz)</td></tr><tr><td>100Hz</td><td>µg RMS/√(Hz)</td><td>98</td><td>µm/s² RMS/√(Hz)</td></tr><tr><td>1000Hz</td><td>µg RMS/√(Hz)</td><td>88</td><td>µm/s² RMS/√(Hz)</td></tr><tr><td>10000Hz</td><td>µg RMS/√(Hz)</td><td>49</td><td>µm/s² RMS/√(Hz)</td></tr><tr><td>0.02</td><td>g/µε</td><td>0.20</td><td>m/s²/µε</td></tr></table>		100	mV/g	10.2	mV/ m/s ²	± 50	g pk	± 490	m/s ² pk	0.5 to 4,000	Hz	0.5 to 4,000	Hz	0.3 to 10000	Hz	0.3 to 10000	Hz	>40	kHz	>40	kHz	2 to 3000	Hz	2 to 3000	Hz	± 1%	%F.S	± 1%	%F.S	6%		6%		0.0008	g RMS	0.008	m/s ² RMS	1Hz	µg RMS/√(Hz)	981	µm/s ² RMS/√(Hz)	10Hz	µg RMS/√(Hz)	491	µm/s ² RMS/√(Hz)	100Hz	µg RMS/√(Hz)	98	µm/s ² RMS/√(Hz)	1000Hz	µg RMS/√(Hz)	88	µm/s ² RMS/√(Hz)	10000Hz	µg RMS/√(Hz)	49	µm/s ² RMS/√(Hz)	0.02	g/µε	0.20	m/s ² /µε	<div><div><div>TYPICAL LOW FREQUENCY RESPONSE</div></div><div><div>TYPICAL PHASE RESPONSE</div></div><div><div>TYPICAL SENSITIVITY RESPONSE OVER TEMPERATURE</div></div><div><div></div></div></div>	
100	mV/g	10.2	mV/ m/s ²																																																														
± 50	g pk	± 490	m/s ² pk																																																														
0.5 to 4,000	Hz	0.5 to 4,000	Hz																																																														
0.3 to 10000	Hz	0.3 to 10000	Hz																																																														
>40	kHz	>40	kHz																																																														
2 to 3000	Hz	2 to 3000	Hz																																																														
± 1%	%F.S	± 1%	%F.S																																																														
6%		6%																																																															
0.0008	g RMS	0.008	m/s ² RMS																																																														
1Hz	µg RMS/√(Hz)	981	µm/s ² RMS/√(Hz)																																																														
10Hz	µg RMS/√(Hz)	491	µm/s ² RMS/√(Hz)																																																														
100Hz	µg RMS/√(Hz)	98	µm/s ² RMS/√(Hz)																																																														
1000Hz	µg RMS/√(Hz)	88	µm/s ² RMS/√(Hz)																																																														
10000Hz	µg RMS/√(Hz)	49	µm/s ² RMS/√(Hz)																																																														
0.02	g/µε	0.20	m/s ² /µε																																																														
<div>ENVIRONMENTAL</div> <div>Maximum Shock</div> <div>Temperature Range</div> <div>Seal</div>		<table><tr><td>5000</td><td>g pk</td><td>49050</td><td>m/s² pk</td></tr><tr><td>-60 to +225</td><td>°F</td><td>-51 to 107</td><td>°C</td></tr><tr><td>Hermetic</td><td></td><td>Hermetic</td><td></td></tr></table>		5000	g pk	49050	m/s ² pk	-60 to +225	°F	-51 to 107	°C	Hermetic		Hermetic																																																			
5000	g pk	49050	m/s ² pk																																																														
-60 to +225	°F	-51 to 107	°C																																																														
Hermetic		Hermetic																																																															
<div>ELECTRICAL</div> <div>Supply Current [4]</div> <div>Compliance Voltage Range</div> <div>Output Impedance TYP</div> <div>Bias Voltage</div> <div>Discharge Time Constant</div>		<table><tr><td>2 to 20</td><td>mA</td><td>2 to 20</td><td>mA</td></tr><tr><td>+18 to +30</td><td>V</td><td>+18 to +30</td><td>V</td></tr><tr><td>150</td><td>Ω</td><td>150</td><td>Ω</td></tr><tr><td>+11 to +13</td><td>VDC</td><td>+11 to +13</td><td>VDC</td></tr><tr><td>1.2 to 2.2</td><td>sec</td><td>1.2 to 2.2</td><td>sec</td></tr></table>		2 to 20	mA	2 to 20	mA	+18 to +30	V	+18 to +30	V	150	Ω	150	Ω	+11 to +13	VDC	+11 to +13	VDC	1.2 to 2.2	sec	1.2 to 2.2	sec																																										
2 to 20	mA	2 to 20	mA																																																														
+18 to +30	V	+18 to +30	V																																																														
150	Ω	150	Ω																																																														
+11 to +13	VDC	+11 to +13	VDC																																																														
1.2 to 2.2	sec	1.2 to 2.2	sec																																																														
<div>Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-3263A3 for more information.</div>																																																																	



21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax:818.698.0362 www.dytran.com For permission to reprint this content, please contact info@dytran.com